

Energie-Positief

Goudsmit Expl. BV
Ringdijk B P 10
1188 WC Amstelveen
0297582881
Iban NL97ABNA0434027545
KVK nummer 33155182
BTW nummer NL048.02.925 B02

DC FAST CHARGING STATION

SAFE, FAST AND RELIABLE

SETEC Power 100kW DC Quick charging station offers Electric Vehicle owners an opportunity to charge their car safely and quickly. A typical electric car with 24kWh battery pack may be charged as quickly as less than 10 minutes to get up to 80% of its capacity.


SETEC combines industry standardization with advanced charging technology to support next-generation electric vehicles. Its multi-protocol design allows for easy tailoring to support Chademo and CCS standards for DC fast charging applications. Payment & billing platform solutions enable easy and secure payments via station payment terminals and RFID card.

FEATURES

- Built-in safety measures
- User friendly interface
- Flexible multi-protocol design
- CHAdeMO and CCS protocol compatible
- OCPP 1.6
- Durable enclosure
- Wide temperature range: -25°C to +65°C
- Data management and metering options

APPLICATIONS

- Service station operators
- Public corridor charging along the highways
- Busy urban areas
- Commercial fleet operators
- EV Infrastructure operators and EVSE providers

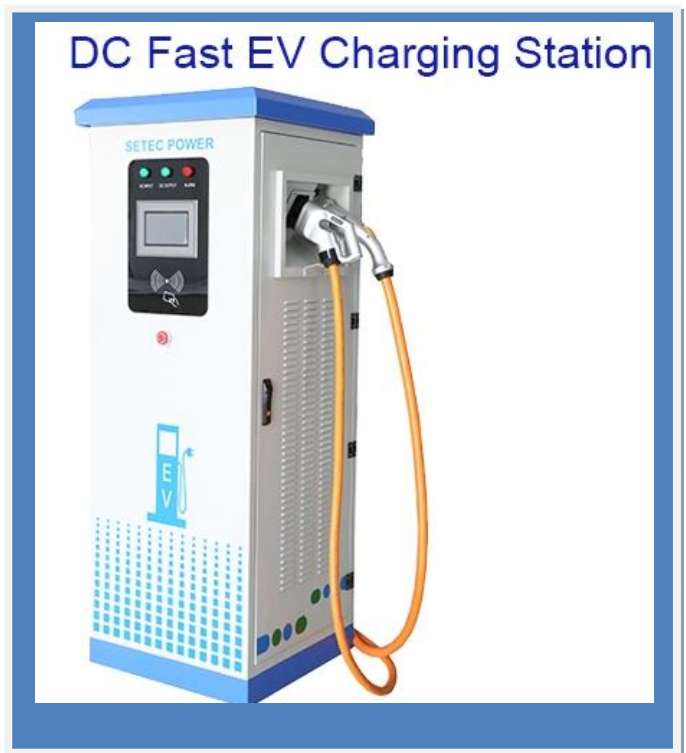

Technical specifications

System

Type Single DC fast-charging station

Operating temperature -25°C to +65°C

Storage temperature -40°C to +70°C

Relative humidity 20% to 95%

Environment Indoor / outdoor

Input

AC power connection 3P + PE

Input voltage range 305-520 VAC

Frequency 40-65HZ

Power factor 0.99

Current THD 5%

Input under-voltage protection Yes

Output

Output voltage (50-500Vdc)/ (300-750Vdc)

Output current 200A/ 100A

Output power 100KW

Output over-current protection Yes

Output short-circuit protection Yes

General

Dimensions (D x W x H)

Charge station 60x74x173cm (Cabinet)

Weight

Charge station 300 kg

Protection degree IP54

Cooling Forced air

Parallel modules No. 64



Chamedo






CCS



- 1.Plug
- 2.Latch(For locking)
- 3.LED lamp
- 4.Release Button
- 5.Cable Rubber sheath
- 6.Connector main body
- 7.Grip Integrated with main body

Specification

Item	CHAdeMO		CCS		GB/T	
Rated voltage	500VDC		200-650VDC		400-750VDC	
Rated current	125A		200A		63A-250A	